


## High Density Patch Cords Specification

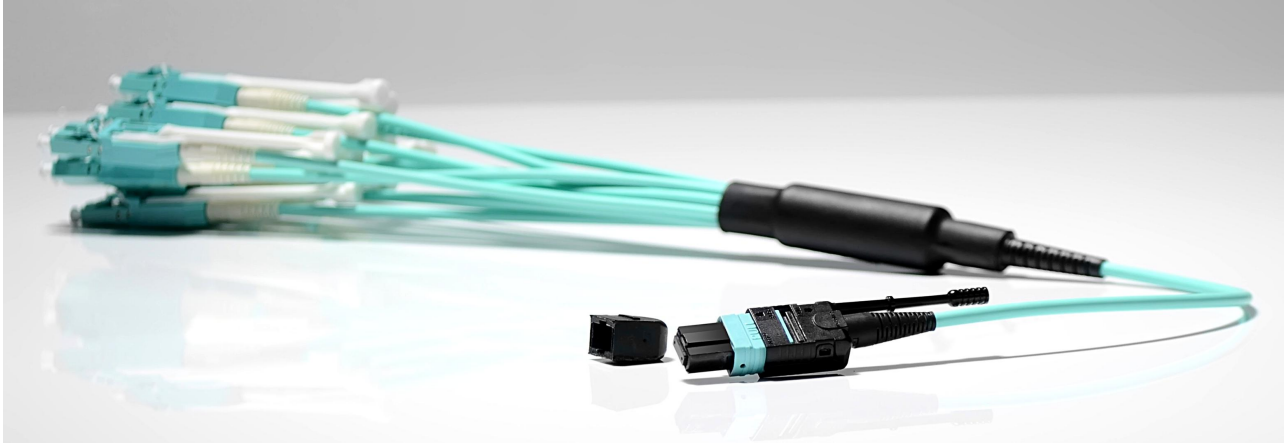

### Application


- 1.Data communication network.
- 2.Optical System Access network.
- 3.Storage area networking fiber channel.
- 4.High density architectures.

### Features

- 1.100% pre-terminated and tested in factory to ensure transfer performance.
- 2.Rapid configuration and networking, reduce installation time.
- 3.Supports 40G and 100G network applications.
- 4.Cable Jacket material: LSZH, OFNR, OFNP available.
- 5.Supports up to 12F, 24F, 48F, 72F, 96F, 144F, customized products are available.

### Dimensional Diagrams

#### 1.High Density Patch Cords

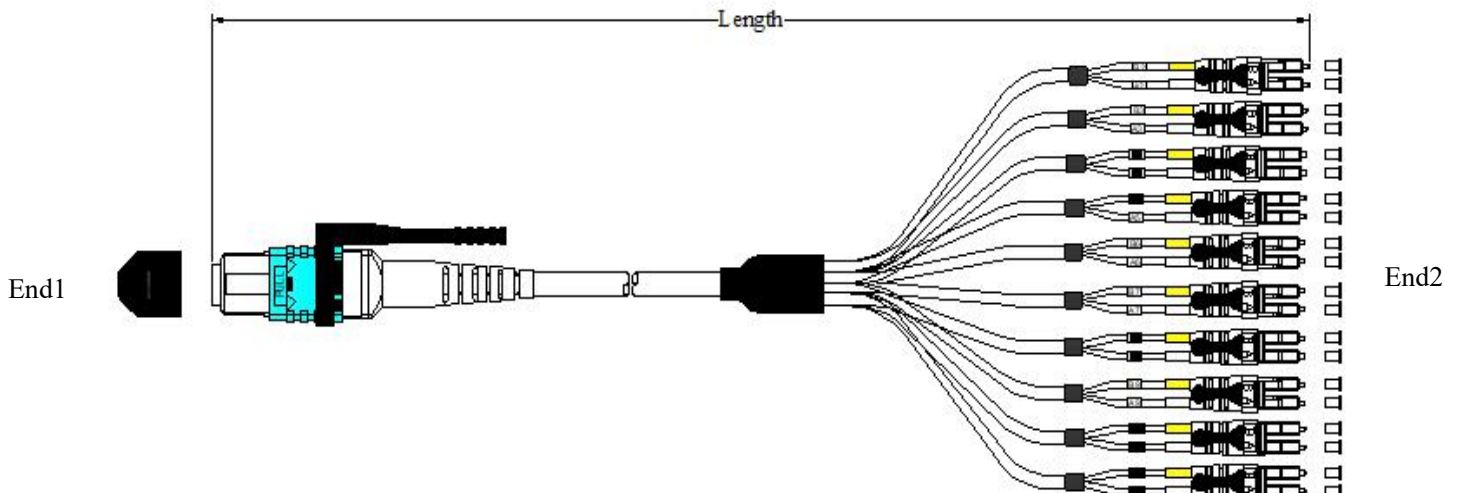

### Patch cord versions

| Jumper tolerance requirement |                          |
|------------------------------|--------------------------|
| Overall length (L) (M)       | length of tolerance (CM) |
| $0 < L \leq 20$              | +10/-0                   |
| $20 < L \leq 40$             | +15/-0                   |
| $L > 40$                     | +0.5%L/-0                |

### Cable Structure



### Cable Parameters

| Fiber account | OD(mm)   | Nominal Weight (kg/km) | Max.tensile Strength(N) |           | Max.Crush Resistance (N/100mm) |           | Min.Bending Radius(mm) |        |
|---------------|----------|------------------------|-------------------------|-----------|--------------------------------|-----------|------------------------|--------|
|               |          |                        | Short-term              | Long-term | Short-term                     | Long-term | Dynamic                | Static |
| 8             | 3.0±0.15 | 6.8                    | 180                     | 90        | 500                            | 150       | 20D                    | 10D    |
| 12            | 3.0±0.15 | 7.0                    | 180                     | 90        | 500                            | 150       | 20D                    | 10D    |

### MPO&MTP Optical Characteristics

| Item           | Parameter                    |                              |                              |                              | Reference      |
|----------------|------------------------------|------------------------------|------------------------------|------------------------------|----------------|
|                | Single mode                  |                              | Multimode                    |                              |                |
|                | Standard                     | Elite                        | Standard                     | Elite                        |                |
| Insertion loss | Typical≤0.30dB<br>Max≤0.75dB | Typical≤0.15dB<br>Max≤0.35dB | Typical≤0.50dB<br>Max≤0.25dB | Typical≤0.10dB<br>Max≤0.35dB | IEC 61300-3-34 |
| Return loss    | ≥ 50dB (PC)<br>≥ 60dB (APC)  | ≥ 55dB (PC)<br>≥ 65dB (APC)  | ≥30dB(PC)                    | ≥30dB(PC)                    | IEC 61300-3-6  |

### LC/SC/FC/ST Optical Characteristics

| Item           | Parameter                         |                                   | Reference      |
|----------------|-----------------------------------|-----------------------------------|----------------|
|                | Single mode                       | Multimode                         |                |
| Insertion loss | Typical value≤0.15dB;Maximum≤0.30 | Typical value≤0.15dB;Maximum≤0.30 | IEC 61300-3-34 |
| Return loss    | ≥ 60dB (APC);<br>≥ 50dB (UPC)     | ≥30dB (UPC)                       | IEC 61300-3-6  |

### LC/SC/FC/ST End-Face Geometry

| Item                     | UPC (Ref: IEC 61755-3-1) | APC (Ref: IEC 61755-3-2) |
|--------------------------|--------------------------|--------------------------|
| Radius of curvature (mm) | 10 to 25                 | 5 to 12                  |
| Fiber height (nm)        | -100 to 100              | -100 to 100              |
| Apex offset (μm)         | 0 to 50                  | 0 to 50                  |
| APC angle (°)            | /                        | 8° ±0.2°                 |
| Key error (°)            | /                        | 0.2° max                 |

### MPO&MTP End-Face Geometry

| Ferrule parameter |          | IEC-61300--3-30 |         |
|-------------------|----------|-----------------|---------|
|                   |          | Minimum         | Maximum |
| ROC               | ROC-X:   | 2000mm          | ∞       |
|                   | ROC-Y:   | 50mm            | ∞       |
| Angle             | Angle-X: | -0.2°           | 0.2°    |
|                   | Angle-Y: | PC              | 0.2°    |
|                   |          | APC             | 7.85°   |
| Fiber Hight:      |          | 1000nm          | 3500nm  |
| Max.DH.All:       |          | -300nm          | 300nm   |
| DH.Adj:           |          | -300nm          | 300nm   |
| DH.Ave Fiber:     |          | -300nm          | 300nm   |
| Core Dip:         | MM       | -200nm          | 300nm   |
|                   | SM       | N/A             | N/A     |
| Ferrule height    |          | 7.9mm           | 8.05mm  |

### End-Face Quality (SM)

| Zone               | Range (μm) | Scratches | Defects | Reference           |
|--------------------|------------|-----------|---------|---------------------|
| A: Core            | 0 to 25    | None      | None    | IEC 61300-3-35:2015 |
| B: Cladding        | 25 to 115  | None      | None    |                     |
| C: Adhesive        | 115 to 135 | None      | None    |                     |
| D: Contact         | 135 to 250 | None      | None    |                     |
| E: Rest of ferrule |            | None      | None    |                     |

### End-Face Quality (MM)

| Zone               | Range (μm) | Scratches | Defects | Reference           |
|--------------------|------------|-----------|---------|---------------------|
| A: Core            | 0 to 65    | None      | None    | IEC 61300-3-35:2015 |
| B: Cladding        | 65 to 115  | None      | None    |                     |
| C: Adhesive        | 115 to 135 | None      | None    |                     |
| D: Contact         | 135 to 250 | None      | None    |                     |
| E: Rest of ferrule |            | None      | None    |                     |

### Mechanical Characteristics

| Test                           | Conditions                                         | Reference      |
|--------------------------------|----------------------------------------------------|----------------|
| Endurance                      | 500 matings                                        | IEC 61300-2-2  |
| Vibration                      | Frequency: 10 to 55Hz, Amplitude: 0.75mm           | IEC 61300-2-1  |
| Cable retention                | 400N (main cable); 50N (connector part)            | IEC 61300-2-4  |
| Strength of coupling mechanism | 80N for 2 to 3mm cable                             | IEC 61300-2-6  |
| Cable torsion                  | 15N for 2 to 3mm cable                             | IEC 61300-2-5  |
| Fall                           | 10 drops, 1m drop height                           | IEC 61300-2-12 |
| Static lateral load            | 1N for 1h (main cable); 0.2N for 5min (ranch part) | IEC 61300-2-42 |
| Cold                           | -25°C, 96h duration                                | IEC 61300-2-17 |
| Dry heat                       | +70°C, 96h duration                                | IEC 61300-2-18 |
| Change of temperature          | -25°C to +70°C, 12 cycles                          | IEC 61300-2-22 |
| Humidity                       | +40°C at 93%, 96h duration                         | IEC 61300-2-19 |