


Mini DWDM Modules Specification

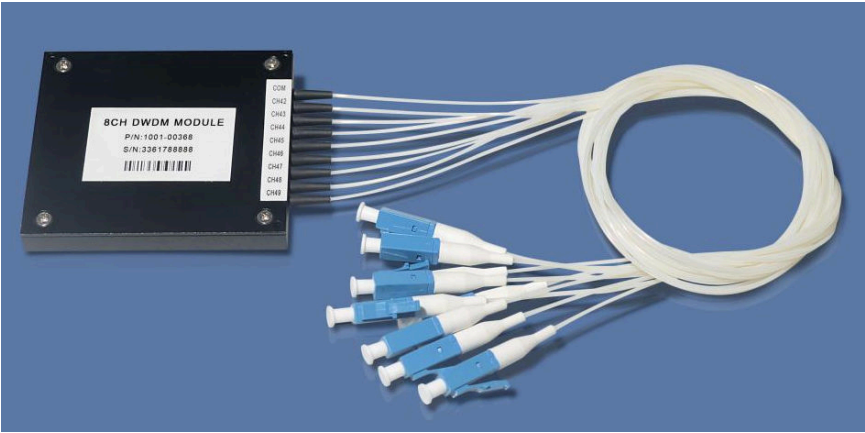

Description

DWDM modules are based on Thin-Film Technology and All-Glass Packaged platform, keeping the device in compact size and excellent performance. Excellent device qualification test ensure the long term performance of module products in field applications.


Features

- Low Insertion Loss
- Excellent Channel Isolation
- High Channel Isolation
- High Stability and reliability
- Epoxy-free on Optical Path
- Low Cost

Applications

- WDM Channels Add/Drop Systems
- WDM Networks & Systems
- CATV Fiber Optical Links
- Long Haul & Short-Distance Applications
- Accessing LAN & WAN Network

Package Dimension

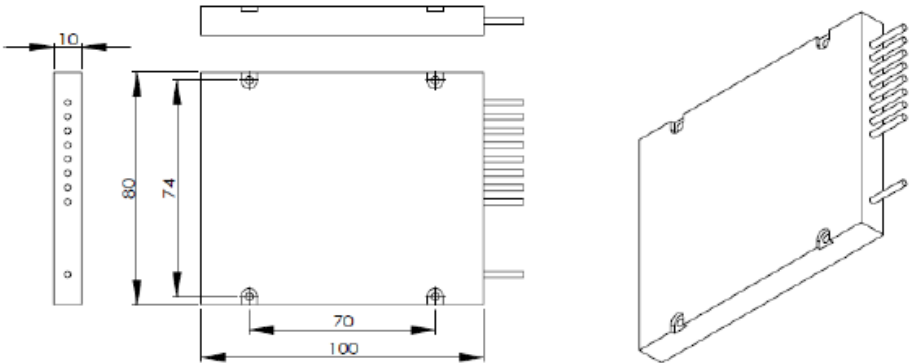

A: 100X80X10 ABS box

Performance Specifications

Parameters		Unit	Specifications			
1	Operating Wavelength Range	nm	1260 ~ 1620		1520 ~ 1570	
2	Channel Spacing	---	20nm		100GHz	
3	Channel Passband (@-0.5dB bandwidth)	nm	IUT \pm 6.5		UT \pm 0.125	
4	Channel Quantity	---	C4CH	C8CH	C4CH	C8CH
5	Max. Pass Band Ripple	dB	<0.35		<0.4	
6	Max. Channel Insertion Loss	dB	\leq 1.5	\leq 2.5	\leq 1.5	\leq 2.5
7	Min. Adjacent Channel Isolation	dB	>30		>30	
8	Min. Non-Adjacent Channel Isolation	dB	>45		>45	
9	Min. Return Loss	dB	\geq 45			
10	Max. PDL	dB	<0.1	<0.1	<0.20	<0.30
11	Insertion Loss Temperature Sensitivity	dB/°C	<0.005			
12	Wavelength Temperature Shifting	nm/°C	<0.002			
13	Max. Power Handling	mW	300			
14	Directivity	dB	\geq 50			
15	Operation Temperature Range	°C	-40 to +80			
16	Storage Temperature Range	°C	-40 to +85			
17	Fiber Jacket & Fiber Length	cm	Customize			
18	Package Dimensions – 1	mm	100 * 80 * 10 or Customize			
19	Package Dimensions – 2	mm	LGX Compatible			
20	Package Dimensions – 3	mm	19" 1U Rack Mounted			
21	Connector Type	--	SC/LC/FC or Customize			
22	Fiber Type and Jacket Color		G.652D / G.657 A1 (or Customize)			

Remark: 0.3dB will be added on IL with connectors pairs included.