


GJFJV Simplex Round Cable

Indoor

Cable structure:

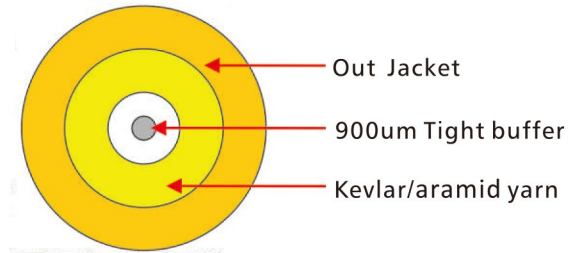

Description:

GJFJV Simplex Round Cable use 900um tight buffer fiber as optical communication medium, the tight buffer fiber wrapped with a layer of yarn as strength member, and the cable is completed with outside jacket. (PVC, OFNR, OFNP, LSZH or other material as requirements)

Features:

- High strength Kevlar yarn member.
- High quality tight buffered or loose tube .
- Round structure, soft and easy to strip.
- Excellent temperature performance.

Application:

- Components for various of indoor cable.
- Suitable for patch cord and pigtails.
- Suitable for various of communication equipments.

Technical parameters

Cable type	OD (mm)	Nominal Weight (kg/km)	Tensile Strength (N)		Crush Resistance (N/100MM)		Bending Radius (mm)	
			Short-term	Long-term	Short-term	Long-term	Dynamic	Static
GJFJV-1Xn	1.8±0.2	2.5	100	60	500	100	20D	15D
GJFJV-1Xn	2.8±0.2	3.5	100	60	500	100	20D	15D
Storage/Working temperature (°C)			-20~+60					

Note: Xn is fiber optic model and D is the diameter of optical cable.

Packing and Reel Length

- ★.Standard wooden drum with protection.
- ★.Standard reel length:2/3 km/reel,other length is also available.